

# SONOFF



## S S26

User manual V1.0




TPG(UK)



TPF(DE)



TPE(FR)



TPB(US)



TPI(AU)



TPAI(CN)



TPH(IL)



TPN(BR)



TPJ(CH)



TPL(IT)

## Wi-Fi Smart Plug

---


# Operating Instruction

## 1. Download APP



Android™ & iOS

## 2. Power on

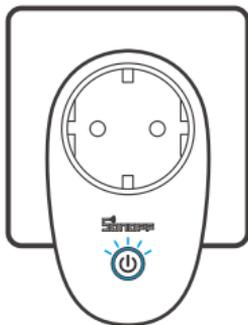

After powering on, the device will enter the quick pairing mode (Touch) during the first use. The Wi-Fi LED indicator changes in a cycle of two short and one long flash and release.

⚠ The device will exit the quick pairing mode (Touch) if not paired within 3mins. If you want to enter this mode, please long press the manual button for about 5s until the Wi-Fi LED indicator changes in a cycle of two short and one long flash and release.

## 3. Add the device



Tap "+" and select "Quick Pairing", then operate following the prompt on the APP.

## Compatible Pairing Mode

If you fail to enter Quick Pairing Mode (Touch), please try "Compatible Pairing Mode" to pair.


- 1 Long press pairing button for 5s until the Wi-Fi LED indicator changes in a cycle of two short flashes and one long flash and release. Long press pairing button for 5s again until the Wi-Fi LED indicator flashes quickly. Then, the device enters Compatible Pairing Mode.
- 2 Tap "+" and select "Compatible Pairing Mode" on APP.

Select Wi-Fi SSID with ITEAD-\*\*\*\*\* and enter the password 12345678, and then go back to eWeLink APP and tap "Next". Be patient until pairing completes.

## Specifications

Model	S26R2TPF/S26R2TPG/S26R2TPI/S26R2TPN//S26R2TPH S26R2TPE/S26R2TPB/S26R2TPAI/S26R2TPJ/S26R2TPL	
Input	S26R2TPF: 250V~, 50/60Hz S26R2TPG: 250V~, 50/60Hz S26R2TPI: 250V~, 50Hz S26R2TPN: 250V~, 50/60Hz S26R2TPH: 250V~, 50/60Hz	S26R2TPE: 250V~, 50/60Hz S26R2TPB: 120V~, 60Hz S26R2TPAI: 250V~, 50/60Hz S26R2TPJ: 250V~, 50/60Hz S26R2TPL: 250V~, 50/60Hz
Max. load	S26R2TPF: 4000W/16A S26R2TPG: 3250W/13A S26R2TPI: 3750W/15A S26R2TPN: 4000W/16A S26R2TPH: 4000W/16A	S26R2TPE: 3680W/16A S26R2TPB: 1800W/15A S26R2TPAI: 4000W/16A S26R2TPJ: 4000W/16A S26R2TPL: 1500W/6A
Operating systems	Android & iOS	
Wi-Fi	IEEE 802.11 b/g/n 2.4GHz	
Working temperature	-10°C~40°C	
Material	PC V0	
Dimension	97.5x56x35mm	

## Product Introduction

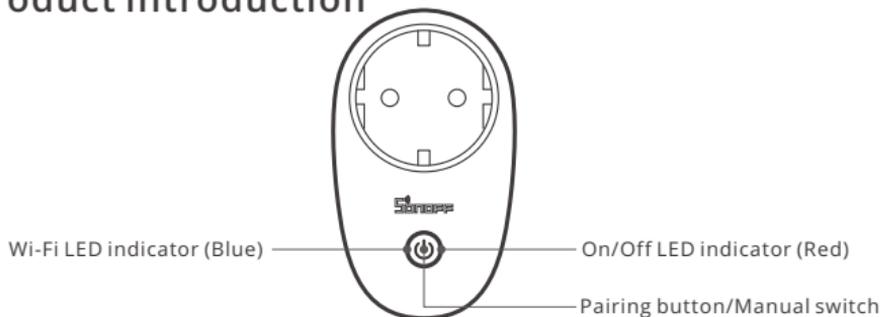

## Wi-Fi LED indicator status instruction

Wi-Fi LED indicator status	Status instruction
Flashes (one long and two short)	Quick Pairing Mode
Keeps on	Device is connected successfully
Flashes quickly	Compatible Pairing Mode
Flashes quickly once	Unable to discover the router
Flashes quickly twice	Connect to the router but fail to connect to Wi-Fi
Flashes quickly three times	Upgrading

## Features

Remotely turn on/off the device, schedule it on/off or share it with your family to control together.



Remote Control



Single/Countdown  
Timing



Voice Control



Share Control



Smart Scene



Inching Mode



Power-on State



Camera Feature




Group control



LAN Control

## Switch Network

If you need to change the network, long press the pairing button for 5s until the Wi-Fi LED indicator changes in a cycle of two short and one long flash and release, then the device enters quick pairing mode and you can pair again.

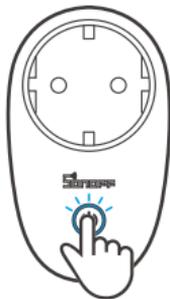

## Factory Reset

Deleting the device on the eWeLink app indicates you restore it to factory setting.

## Common Problems

Q: Why my device stays "Offline"?

A: The newly added device needs 1 – 2mins to connect Wi-Fi and network. If it stays offline for a long time, please judge these problems by the blue Wi-Fi indicator status:

1. The blue Wi-Fi indicator quickly flashes once per 2 seconds, which means that the device failed to connect your Wi-Fi:
  - ① Maybe you have entered a wrong Wi-Fi password.
  - ② Maybe there's too much distance between the switch your router or the environment causes interference, consider getting close to the router. If failed, please add it again.
  - ③ The 5G Wi-Fi network is not supported and only supports the 2.4GHz wireless network.
  - ④ Maybe the MAC address filtering is open. Please turn it off.

**If none of the above methods solved the problem, you can open the mobile data network on your phone to create a Wi-Fi hotspot, then add the device again.**

2. Blue indicator quickly flashes twice per 2 seconds, which means the device has connected to Wi-Fi but failed to connect to the server.

Ensure steady enough network. If double flash occurs frequently, which means you access an unsteady network, not a product problem. If the network is normal, try to turn off the power and restart the device.

Hereby, Shenzhen Sonoff Technologies Co., Ltd. declares that the radio equipment type S26R2TPF/S26R2TPE/S26R2TPG/S26R2TPB/S26R2TPI/S26R2TPAI/S26R2TPN/S26R2TPJ/S26R2TPH/S26R2TPL is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:

<https://sonoff.tech/usermanuals>

The logo features the word "SONOFF" in a bold, black, sans-serif font. Above the letter "O" are three curved lines representing radio signal waves.

**Shenzhen Sonoff Technologies Co., Ltd.**

1001, BLDG8, Lianhua Industrial Park, shenzhen, GD, China  
ZIP code: 518000 Website: sonoff.tech

MADE IN CHINA   1E4     