


DS-D5032QE 31.5" Monitor

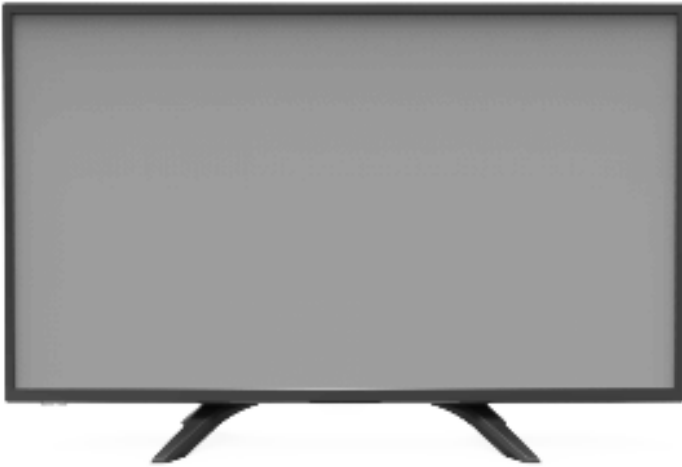

The Hikvision DS-D5032QE 31.5" monitor features a full 1920 x 1080 HD image on a 16.7 million color display. HDMI support up to 1080p in addition to VGA input,

Build-in speakers feature rich sound with 5 Watts of output out of dual speakers.

Available Models:

DS-D5032QE

- LED Backlit Technology with Full HD 1920×1080
- 16.7 Million Color Display
- HDMI Support up to 1080p
- Multiple Inputs: HDMI, VGA
- Built-In Speaker, Audio 5 W x 2
- Auto Signal Input Detection
- Smart Engine for Phase/Image Position/Color Calibration
- Plastic Casing
- Narrow Front Bezel



Specifications

Model	DS-D5032QE	
Backlight	LED backlight	
Screen Size	31.5-inch	
Pixel Pitch	0.36375 mm x 0.36375 mm	
Maximum Resolution	1920 x 1080 @ 60 Hz	
Brightness	300 cd/m ² (typ.)	
Contrast	1400:1 (typ.)	
Response Time	8 ms	
Color	16.7 M	
Active Area	698.4 mm (H) x 392.85 mm (V)	
Viewing Angle	178° (H)/178° (V)	
Interfaces	VGA input	x1
	HDMI input	x1
	Audio input	x1
	RJ-45 (RS-232)	x1
Power Supply	100~240 VAC, 50/60 Hz	
Power Consumption	<55 W	
Standby Power Consumption	<0.5 W	
Loudspeaker	5 W x 2	
Working Temperature	41° - 104° F (5° - 40° C)	
Working Humidity	20 % - 80% RH (no condensation)	
Storage Temperature	-4° - 140° F (-20° - 60° C)	
Storage Humidity	10% - 90% RH (no condensation)	
Casing Color	Black	
VESA	M4, 100 mm x 100 mm	
Dimensions (W x H x D)	727 mm x 474 mm x 64 mm (with base)/727 mm x 424 mm x 64 mm	
Packing Dimensions (W x H x D)	804 mm x 500 mm x 136 mm	
Gross Weight	6.763 Kg	
Net Weight	5.09 Kg	
Accessories	Power cord	x1
	Battery	x1
	Remote control	x1
	User manual	x1
Brackets	Pedestal	x1
	Wall mount	Optional
*NOTE	All specifications mentioned above are subject to the actual product	

Interfaces

No.	Description
①	RJ-45, RS-232
②	HDMI In
③	VGA In
④	Audio In



Dimensions (unit: mm)

