




Linerless Label, Peeler, Auto Cutter

APEX SERIES

GA-2408T

4inch Direct Thermal & Thermal Transfer Barcode Printer

KEY FEATURES

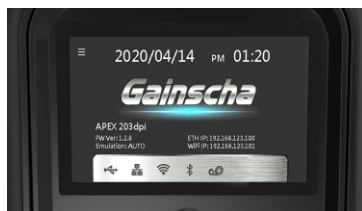

- Support 4.3inch touch panel
Intuitive user interface for visible operation

- High-performance barcode printer with complete configuration and rich expansion capabilities, easy to integrate with your existing and new software. Adopt liner-less label channel design, work with all types of print media in the field.



APEX SERIES 4inch Direct Thermal & Thermal Transfer Barcode Printer

MODEL	GA-2408T	GA-3406T	GA-2408T	GA-3406T
Level	Standard	Standard	Empower	Empower
Resolution	8dots/mm (203DPI)	12dots/mm (300DPI)	8dots/mm (203DPI)	12dots/mm (300DPI)
Printing Method	Thermal Transfer & Direct Thermal			
Max. print speed	203mm(8")/second	152mm(6")/second	203mm(8")/second	152mm(6")/second
Max. print width	104 mm (4.1 ")	108.4 mm (4.27 ")	104 mm (4.1 ")	108.4 mm (4.27 ")
Memory RAM	128 MB SDRAM			
Memory ROM	128 MB Flash Memory			
Communication Ports	<ul style="list-style-type: none"> • USB 2.0 High Speed 480Mbps • USB Host 2.0, for scanner or PC keyboard • RS-232 • Internal Ethernet 10/ 100Mbps • Internal Bluetooth 4.0 (factory option) • Internal WiFi (factory option) 			
Power	External universal switching power supply Input: AC 100-240V, 2.5A, 50-60Hz. Output: DC 24V, 2.5A, 60W			
Internal fonts	<ul style="list-style-type: none"> • 8 alpha-numeric bitmap fonts • True type font engine (need to download scalable font file) 			
User Interface	<ul style="list-style-type: none"> • 1 power switch • 1 buttons (Feed) • 5 LEDs (Online, Error, Ribbon, Press-key white, Communication) 		<ul style="list-style-type: none"> • 1 power switch • 1 button (Feed) • 1 LED(Press-key white) • 4.3" TFT-LCD 480 x 272 dots with Capacitive touch panel 	
Rotation	Font and barcode support 0, 90, 180, 270 degree			
Printer language	Compatible to TSPL, EPL, ZPL, ZPL II, DPL			
Physical dimension	190mm(W) * 198.3mm(H) * 280mm(D)			
Net Weight	2.3kg			



Accessories

- Windows labeling software CD disk
- Quick start guide
- USB cable
- Power cord
- 1" ribbon spindle x 2 for 300M ribbon
- External universal switching power supply

Enclosure

Clamshell with double-walled plastic

Applications:

- Shipping
- Warehousing
- Retail
- Library
- Logistics
- Transportation
- Restaurant fast food service
- Ticketing
- Manufacturing
- High-value assets tracking

Safety regulation

Comply with RoHS, REACH, WEEE

Safety regulation

FCC Class A, CE Class A, CCC, BIS, CB

