Ruijie SRcycc

RG-EW3200GX PRO 3200Mbps Dual-band Wi-Fi 6 Mesh Router

DATASHEET



Highlights

- Next-Gen Gigabit Wi-Fi 6 Standard
- 4x4 Enterprise-level Chipset, better stability under heavy load
- 8 Antennas and 8 Signal Amplifiers, provide whole-home network coverage
- Exclusive Reyee Mesh solution, one click to mesh up multiple Reyee Mesh devices
- Take control of your home network at your fingertips





Supported by 4x4 Enterprise Level Chips Enjoy Better Stability under Heavy Load

Tolly proofs that EW3200GX PRO demonstrates more stable network performance at multiple connections.



................

...........

· • • • • • • • • • • • • • • • •

.....

....


.....



Concurrently Support Multiple Devices Connection

MU-MIMO together with OFDMA technology significantly improve network performance for multiple terminals




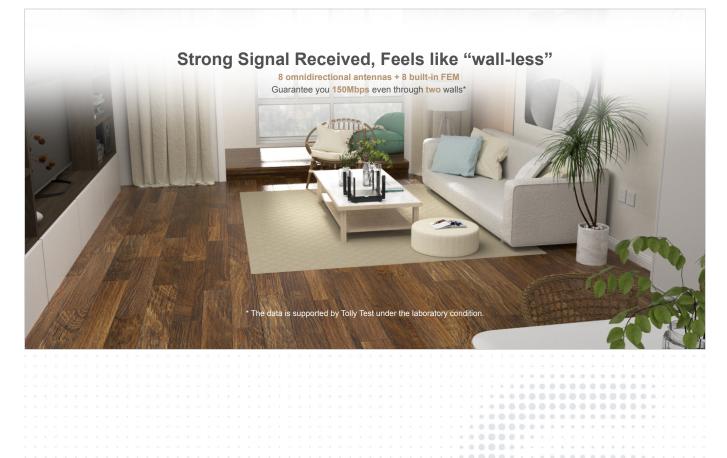

Highlight Features

Rocket Speed, Can't Wait
Equipped with Wi-Fi 6 technology like OFDMA, 1024 QAM, and the latest 802.11ax standard, 3200GX PRO reaches ultra fast spped, 3200Mbps, enhancing the overall networking experience for users.
Wireless Rate under Real Test
2.4GHz
EW3200GX PRO
Other brand 3000M product
5GHz
EW3200GX PRO
34% higher
Other brand 3000M product
* The data is supported by Tolly Test under the laboratory condition.



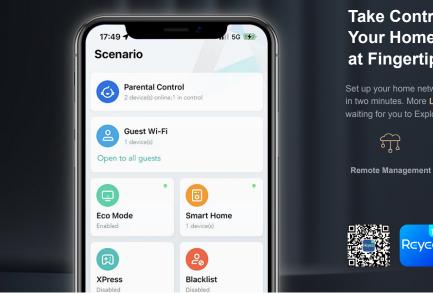

Take Control of Your Home Network at Fingertips

Set up your home network in Reyee Router App in two minutes. More Life-time Free functions are waiting for you to Explore, Experience, Expect.

भी



Smart Home

俞



Rcycc

Google Play App Store



	Basic
Dimensions (W×D×H)	190 mm x 190 mm x 41 mm (7.48 in. × 7.48 in. × 1.61 in. antennas not included)
Weight	0.8 kg (packages not included)
Wi-Fi Standards	Wi-Fi 6 (802.11ax)
MIMO	2.4 GHz, 4×4, MU-MIMO 5 GHz, 4×4, MU-MIMO
Max. Wi-Fi Speed	2.4 GHz: 800 Mbps 5 GHz: 2402 Mbps
Channel Width	2.4 GHz: Auto/20/40 MHz 5 GHz: Auto/20/40/80 MHz
Antennas	8
Antennas Type	External Omnidirectional
Antenna Gain	2.4 GHz: 5 dBi 5 GHz: 6 dBi
WAN Port	1×10/100/1000 Base-T Port
LAN Ports	4×10/100/1000 Base-T Ports
Recommended Users	60
Max. Users	192
Power Supply	DC 12V/2.5A
Power Consumption	≤36W
Operation Frequency Bands	802.11b/g/n: 2.400 GHz to 2.483 GHz 802.11a/n/ac/ax: 5.150 GHz to 5.350 GHz country-speci ic restrictions apply
Transmit Power	Regular: CE EIRP: ≤20 dBm (2.4 GHz) ≤20 dBm (5 GHz)
Operating Temperature	-10 °C to +45 °C (14 °F to 113 °F)
Operating Humidity	5% to 95% Noncondensing
Certifications	CE,RoHS



	Wireless
OFDMA	\checkmark
MU-MIMO	\checkmark
BSS Coloring	\checkmark
Maximum Number of SSIDs	6
SSID Hiding	\checkmark
Band Steering	\checkmark
Guest Wi-Fi	\checkmark
WPA/WPA2	\checkmark
WPA3	-
Roaming	Layer 2 Roaming
Blacklist	\checkmark
Reyee Mesh	\checkmark
Mesh Pairing by Hardware	\checkmark
Mesh Pairing by Mesh Button	\checkmark
Mesh Pairing by Eweb	\checkmark
Recommended Hop Count	≤5
Wi-Fi Optimization	\checkmark
QoS (WMM)	\checkmark
WPS	-
Transmission Power Adjustment	\checkmark
	Hardware
CPU	MT7622
Flash	16 MB



Hardware		
RAM/SDRAM	256 MB	
Color	Black	
System LED Indicator	\checkmark	
Reyee Mesh LED Indicator	\checkmark	
Reyee Mesh Button	\checkmark	
Power Button	-	
Reset Button	\checkmark	

DC Connector Dimensions

5.5 mm x 2.1 mm x 11.5 mm (0.22 in. × 0.08 in. × 0.45 in. antennas not included)

	WAN
Static IP	\checkmark
DHCP	\checkmark
PPPoE	\checkmark
Learning PPPoE Account & Password	\checkmark
VLAN Tagging	\checkmark
	LAN
DHCP Server	\checkmark
Client List	\checkmark
Static IP Assignment	\checkmark
Port-Based Flow Control	\checkmark

Features		
IPv6	\checkmark	
DDNS	\checkmark	
IPTV	\checkmark	



	Features
Alarm	\checkmark
Diagnosis	\checkmark
UPnP	\checkmark
ARP Binding	\checkmark
Port Mapping	\checkmark
DMZ Host	\checkmark
Rate Limitation of Terminals	\checkmark
Hardware Acceleration	\checkmark
MAC Address Cloning	\checkmark
Cloud Management	\checkmark
Repeater Mode	\checkmark
WISP Mode	-
	Security
PPTP VPN Server	\checkmark
PPTP VPN Client	\checkmark
L2TP VPN Client	-
Parental Control	\checkmark
Protect TCP Flood Attacks	\checkmark
Protect ICMP Attacks	\checkmark
Protect UDP Flood Attacks	\checkmark
	System
Default Access/Password	192.168.110.1 No Password Required by Default
URL Access	~



System	
Local Upgrade	\checkmark
Online Upgrade	\checkmark
APP Upgrade	\checkmark
Syslog	-
Backup	\checkmark
Factory Reset	\checkmark
Language	Chinese English Vietnamese Indonesian Thai Arabic Traditional Chinese Spanish Russian

Package Contents

Model	RG-EW3200GX PRO
Wireless Router	1
Power Adapter	1
Quick Start Guide	1
Cat5E UTP Cable	1

Rujje

Redefine your easy network



Ruijie Networks Co., Ltd Floor 11, East Wing, Zhongyipengao Plaza, No.29 Fuxing Road, Haidian District, Beijing China Website: https://www.ruijienetworks.com